

Diesel Generating Set TNXS - 41

50Hz

General Features

- | | | |
|--------------|-----------|------------------------|
| ● Engine | 4DX21-53D | FAWDE Made in China |
| ● Alternator | WHI224C | Wattek Made in China |
| ● Controller | HGM6110U | Smartgen Made in China |

Prime power 30KW/37.5kVA

Standby power 33kW/41.25kVA



- Electronic speed control
- 24V starting batteries, maintenance-free type, connecting cables
- Equipped with CHINT MCCB; ABB in Option
- Equipped with industrial silencer and flexible exhaust hose
- Radiator 40°C max, fans are driven by belt with safety guard

- 24V charge dynamo
- Equipped with 8-hours operation base tank
- Design comply to ISO8528/GB2820
- Absorber (anti instant braking)
- User manual, Packing list

General Ratings

Voltage	Power				Frequency (Hz)	Phase	P.F (COSφ)	Prime Current (A)
	Prime kw	Prime kva	Standby kw	Standby kva				
240/415V	30.0	37.5	33.0	41.3	50	3	0.8	52.2
230/400V	30.0	37.5	33.0	41.3	50	3	0.8	54.1
220/380V	30.0	37.5	33.0	41.3	50	3	0.8	57.0

Prime power

This rating is for the supply of continuous electrical power at variable load. A 10% overload capability is available for a period of 1 hour within each 12-hour period of operation.

Standby power

This rating is for the supply of continuous electrical power at variable load in the event of utility power failure. No overload is permitted.

Rated voltage

Available with customers requirements.

Sales Promise

TANON POWER provides a full line of 100% brand new and high quality products.

Each and every unit is strictly factory tested before delivery.


Warranty is according to below standard conditions, subject to the earlier one.

1. 15 months, counted on the day TANON sold to the first buyer.
2. One year after installation.
3. 1500 running hours.


Service and parts are available from TANON or distributors in your location.

Dimension And Weight

Open frame
Size(L×W×H):1800×850×1250(mm)
N.W.:850 (kgs)

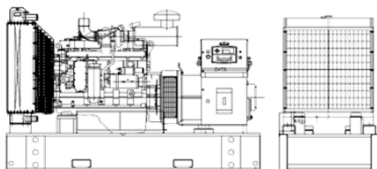

Silent with Canopy
Size(L×W×H):2280×950×1260(mm)
N.W.:1100 (kgs)

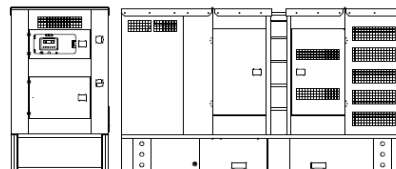

Diesel Generating Set TNXS - 41

50Hz

Engine Specifications

1	Engine model	4DX21-53D
2	Engine manufacturer	FAWDE
3	Number of cylinders	4
4	Cylinder arrangement	Vertical in line
5	Cycle	4 stroke
6	Aspiration	Natural
7	Bore×Stroke(mm×mm)	102x 118
8	Displacement (Liter)	3.857
9	Compression Ratio	17:1
10	Prime power/speed (kW/RPM)	39/1500RPM
11	Standby power/speed (kW/RPM)	42.9/1500RPM
12	Speed governor	electronic
13	Cooling system	Water-cooled
14	Coolant capacity (engine only) (L)	16
15	Steady speed droop (%)	≤5%
16	Total lubrication system capacity (L)	12.8
17	Oil consumption (% of fuel)	<0.15%
18	Fuel consumption at 100% load (L/H)	9.3
19	Fuel consumption at 75% load (L/H)	7.5
20	Fuel consumption at 50% load (L/H)	5.6
21	Starter motor	24V
22	Dynamo	24V

Alternator Specifications

Compliance with GB755,BS5000,VDE0530,NEMAMG1-22,IED34-1,CSA22.2 and AS1359

1	Alternator model	WHI224C
2	Alternator manufacturer	Wattek
3	Exciter type	Single bearing, Brushless, Self-excited
4	Rated output prime power	42.5KVA
5	Rated speed	1500 RPM
6	Rated frequency	50 Hz
7	Phase	3
8	Rated voltage	400V
9	Power factor	0.8
10	Voltage adjust range	≥5%
11	Voltage regulation NL-FL	≤±1%
12	Insulation grade	H
13	Protection grade	IP22

Alternator option

Mecc Alte, Stamford, Leroy Somer


Main Electrical Performance Data

Voltage				Frequency			
Stable Regulation rate	Fluctuation	Recover time	Instantaneous Regulating rate	Stable regulation rate	Instantaneous regulating rate	Recover time	Fluctua-tion
+/-2.5%	0.5%	1.5s	+20%/-15%		+/-10%	5S	0.5%

Diesel Generating Set TNXS - 41

50Hz

Control System

Deepsea (UK)	Model	HGM6110U
Protection	Parameter	PHOTO
<ul style="list-style-type: none"> ● Low oil pressure ● High water temp ● Over speed ● over crank ● Over load ● Over/low volt ● Over/low frequency ● Battery charge failure 	<ul style="list-style-type: none"> ● Volt ● current ● power ● speed ● frequency ● oil pressure ● oil temp ● power factor ● running time ● water temp ● battery voltage 	

Option

Generator Set

- Trailer generator set
- ABB MCCB circuit breaker
- 50°C Radiator

Fuel system

- 12 hours base fuel tank
- 24 hours base fuel tank
- Dual wall base fuel tank
- External fuel tank

Exhaust system

- Residential exhaust silencer

Alternator

- PMG excitation
- Anti Condensation Heater

For cold area

- Water heater
- Oil heater
- Rapid water preheater (diesel burner)

Auto system

- Remote Control panel
- ATS control cabinet
- Paralleling System

External ATS



220V water heater



Diesel powered heater



220V Oil heater Syn. Cabinet



Parker separator



TANON POWER reserves the right to change the specifications and design without notice.